


Rotary Variable Differential Transformer (TANDEM RVDT)

Use For TQA in Commercial Aircraft!



Ref.#RVDT3

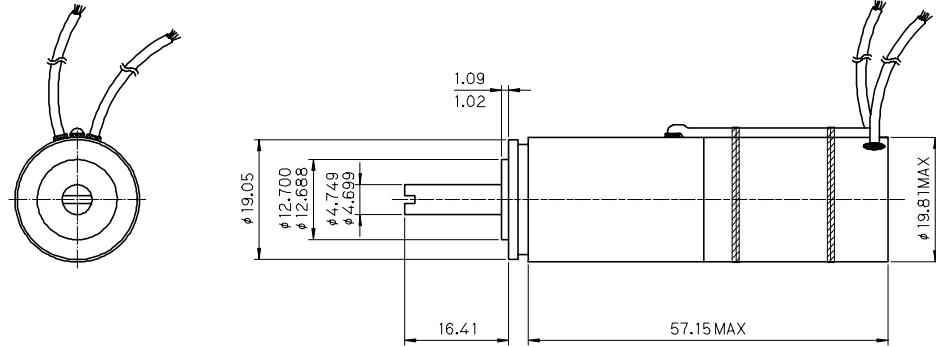

Dimension : mm

Technical Specifications

Lightweight and eco-friendly RVDT!

Contributing to reduction of aircraft weight

Improved Accuracy!

EXCITATION VOLTAGE	7.07±0.35 Vrms
FREQUENCY	3000±50 Hz
SECONDARY SUM VOLTAGE	5.17 Vrms±10%
SCALE FACTOR	0.006628 Vrms/Vrms/Deg
(Va-Vb)/(Va+Vb)	
ACCURACY (±40Deg)	±0.4 Deg
INPUT IMPEDANCE	825Ω to 2302Ω
MASS	142g